


Pierce Playground (Jackson St.)
 M 500, L 5049

APPLIED GEOGRAPHICS, INC. <i>Instrumental and Cartographic Information Systems</i> 100 FRANKLIN ST., PA. BOX 680194, PHILADELPHIA, PA. 19106		APPROVED BY: BRIAN COLLEGE DATE: 10-18-99																																																									
AERIAL PHOTOGRAPHY DATED APRIL 26, 1987 CONTROL AND REORIENTATION BY ABR ASSOCIATES, INC PENNSYLVANIA, PA. SURVEY COMPLETION PREPARED BY GEOD CORPORATION NEW BRUNSWICK, NJ																																																											
TOWN LINE POWER LINES ROAD CENTER LINE BUILDING ROADWAY STEEL RIVER LAKE POND WETLANDS CHANGED COLOR (100)	MAP SHEET NO. SHEET DIMENSION SCALE DIMENSION FINGER NUMBER (100)																																																										
REVISIONS <table border="1"> <thead> <tr> <th>NO.</th> <th>APPROVED BY</th> <th>DATE</th> </tr> </thead> <tbody> <tr><td> </td><td> </td><td> </td></tr> <tr><td> </td><td> </td><td> </td></tr> <tr><td> </td><td> </td><td> </td></tr> <tr><td> </td><td> </td><td> </td></tr> <tr><td> </td><td> </td><td> </td></tr> <tr><td> </td><td> </td><td> </td></tr> <tr><td> </td><td> </td><td> </td></tr> <tr><td> </td><td> </td><td> </td></tr> <tr><td> </td><td> </td><td> </td></tr> <tr><td> </td><td> </td><td> </td></tr> <tr><td> </td><td> </td><td> </td></tr> <tr><td> </td><td> </td><td> </td></tr> <tr><td> </td><td> </td><td> </td></tr> <tr><td> </td><td> </td><td> </td></tr> <tr><td> </td><td> </td><td> </td></tr> <tr><td> </td><td> </td><td> </td></tr> <tr><td> </td><td> </td><td> </td></tr> <tr><td> </td><td> </td><td> </td></tr> </tbody> </table>			NO.	APPROVED BY	DATE																																																						
NO.	APPROVED BY	DATE																																																									

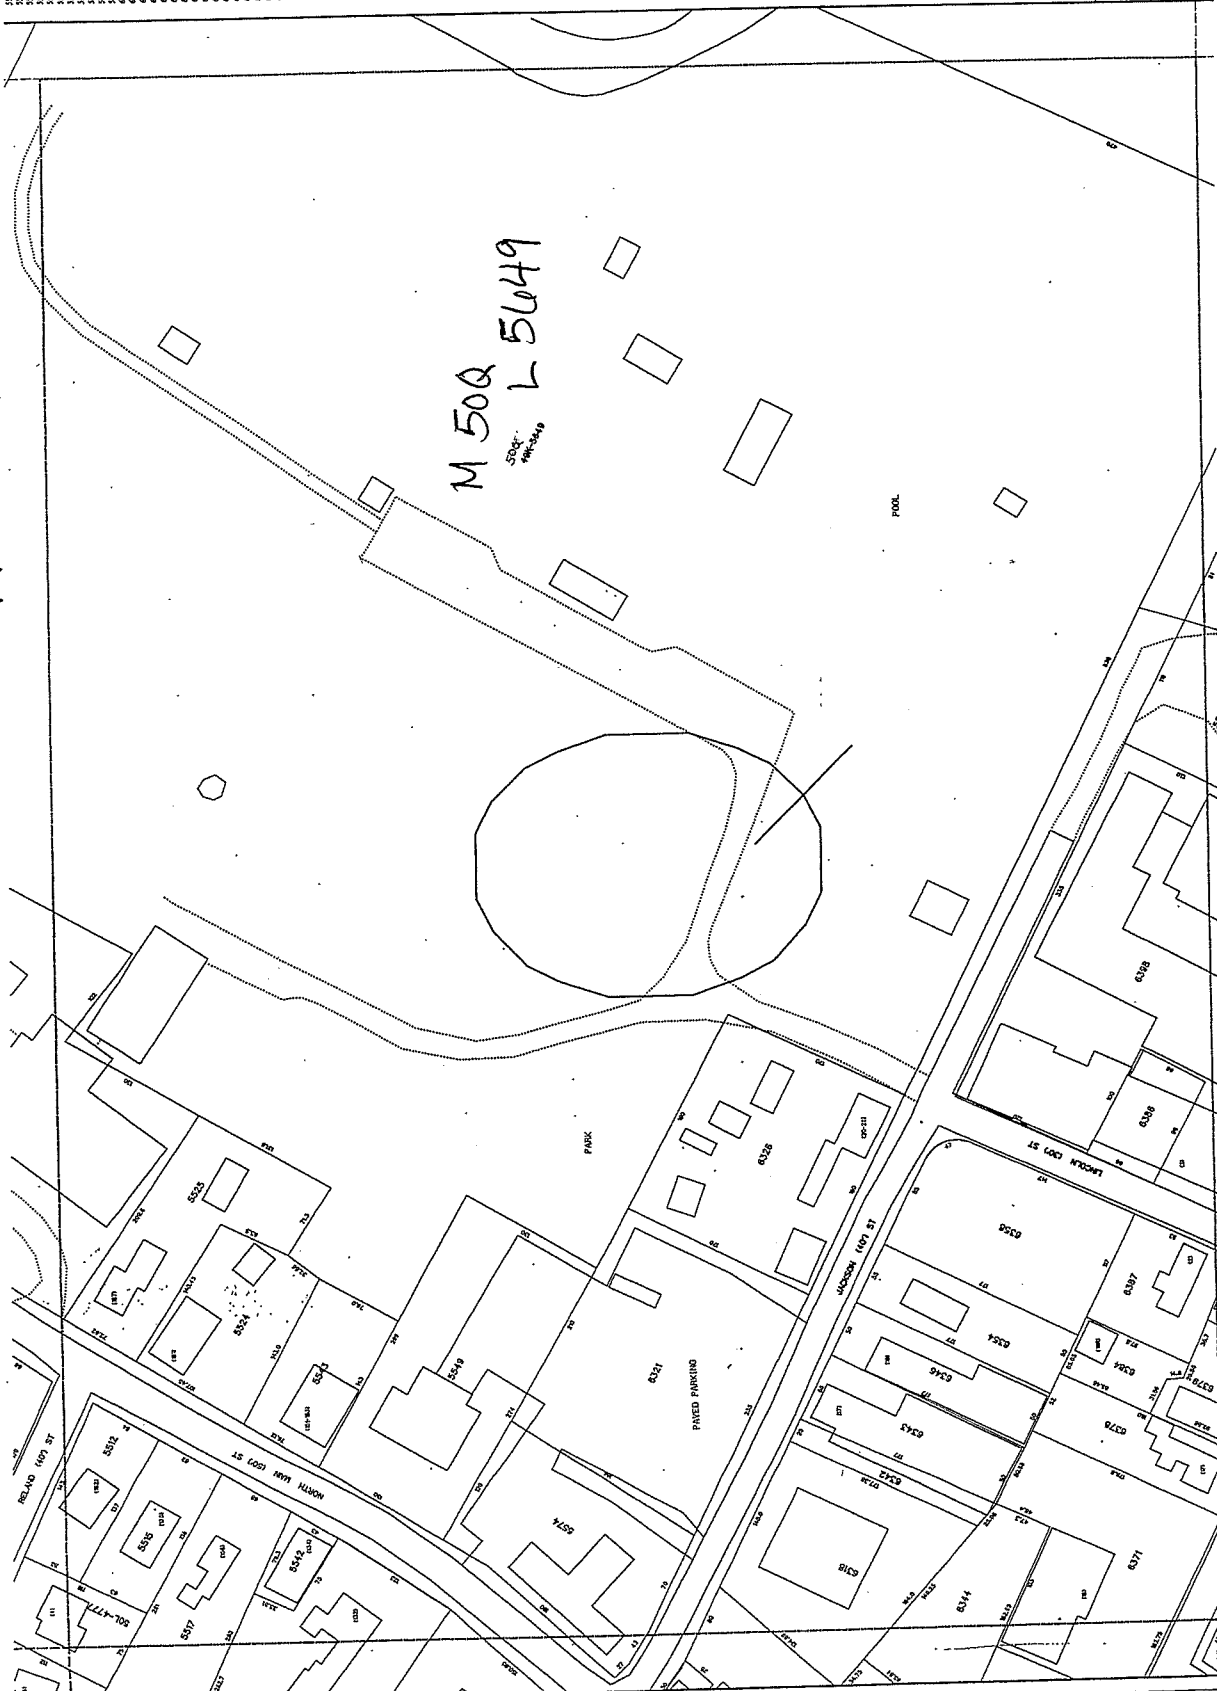

A	B	C	D
E	F	G	H

tot lot

Map 502, Lot 5649

LOCATION:

Pierce Playground (Jackson St.)

Facility Inventory

ACTIVITY	EQUIPMENT	NOTES
Picnic Facilities	Tables & Benches	Located adjacent to accessible paths
		Access to Open Spaces
	Grills	Back and Arm Rests
		Adequate number
	Trash Cans	Height of Cooking Surface
Picnic Shelters	Located adjacent to accessible paths	
	Located adjacent to accessible paths	
Trails		Located near accessible water fountains, trash can, restroom, parking, etc.
		Surface material
		Dimensions
		Rails
Swimming Facilities	Pools	Signage (for visually impaired)
		Entrance
		Location from accessible parking
	Beaches	Safety features i.e. warning for visually impaired
		Location from accessible path into water
		Handrails
Play Areas (tot lots)	All Play Equipment i.e. swings, slides	Location from accessible parking
	Access Routes	Shade provided
		Same experience provided to all
Game Areas: *ballfield *basketball *tennis	Access Routes	Located adjacent to accessible paths
		Enough space between equipment for wheelchair
	Equipment	Located adjacent to accessible paths
		Berm cuts onto courts
		Height
Boat Docks	Access Routes	Dimensions
		Spectator Seating
Fishing Facilities	Access Routes	Located adjacent to accessible paths
		Handrails
	Equipment	Arm Rests
		Bait Shelves
		Handrails
Programming	Are special programs at your facilities accessible?	Fish Cleaning Tables
		Learn-to-Swim
		Guided Hikes
Services and Technical Assistance		Interpretive Programs
		Information available in alternative formats i.e. for visually impaired
		Process to request interpretive services (i.e. sign language interpreter) for meetings

LOCATION

Peirce Playground

PARKING

Total Spaces	<i>5 legal 8 marked</i>	Required Accessible Spaces
Up to 25		1 space
26-50		2 spaces
51-75		3 spaces
76-100		4 spaces
101-150		5 spaces
151-200		6 spaces
201-300		7 spaces
301-400		8 spaces
401-500		9 spaces

Specification for Accessible Spaces	Yes	No	Comments/Transition Notes
Accessible space located closest to accessible entrance			<i>N/A</i>
Where spaces cannot be located within 200 ft of accessible entrance, drop-off area is provided within 100 ft.			
Minimum width of 13 ft includes 8 ft space plus 5 ft access aisle			<i>not enough spaces</i>
Van space — minimum of 1 van space for every accessible space, 8 ft wide plus 8 ft aisle. Alternative is to make all accessible spaces 11 ft wide with 5 ft aisle.			
Sign with international symbol of accessibility at each space or pair of spaces			
Sign minimum 5 ft, maximum 8 ft to top of sign			
Surface evenly paved or hard-packed (no cracks)			
Surface slope less than 1:20, 5%			
Curbcut to pathway from parking lot at each space or pair of spaces, if sidewalk (curb) is present			
Curbcut is a minimum width of 3 ft, excluding sloped sides, has sloped sides, all slopes not to exceed 1:12, and textured or painted yellow			

RAMPS

No

Specification	Yes	No	Comments/Transition Notes
Slope Maximum 1:12		<i>X</i>	
Minimum width 4 ft between handrails		<i>✓</i>	
Handrails on both sides if ramp is longer than 6 ft		<i>✓</i>	
Handrails at 34" and 19" from ramp surface		<i>✓</i>	
Handrails extend 12" beyond top and bottom		<i>✓</i>	
Handgrip oval or round		<i>✓</i>	
Handgrip smooth surface		<i>✓</i>	
Handgrip diameter between 1 1/4" and 2"		<i>✓</i>	
Clearance of 1/2" between wall and wall rail		<i>✓</i>	
Non-slip surface	<i>N/A</i>		
Level platforms (4ft x 4 ft) at every 30 ft, at top, at bottom, at change of direction			

LOCATION

Peirce Playground

SITE ACCESS, PATH OF TRAVEL, ENTRANCES

Specification	Yes	No	Comments/Transition Notes
Site Access			
Accessible path of travel from passenger disembarking area and parking area to accessible entrance		X	
Disembarking area at accessible entrance		✓	
Surface evenly paved or hard-packed			<i>paved</i>
No ponding of water		✓	
Path of Travel			
Path does not require the use of stairs		✓	
Path is stable, firm and slip resistant	✓		
3 ft wide minimum	✓		
Slope maximum 1:20 (5%) and maximum cross pitch is 2% (1:50).			<i>N/A</i>
Continuous common surface, no changes in level greater than 1/2 inch	✓		<i>couple holes</i>
Any objects protruding onto the pathway must be detected by a person with a visual disability using a cane		✓	
Objects protruding more than 4" from the wall must be within 27" of the ground, or higher than 80"		✓	
Curb on the pathway must have curb cuts at drives, parking and drop-offs		✓	
Entrances			
Primary public entrances accessible to person using wheelchair, must be signed, gotten to independently, and not be the service entrance		✓	
Level space extending 5 ft. from the door, interior and exterior of entrance doors		✓	<i>inside hole</i>
Minimum 32" clear width opening (i.e. 36" door with standard hinge)	✓		
At least 18" clear floor area on latch, pull side of door	✓		
Door handle no higher than 48" and operable with a closed fist		✓	<i>3ft 8in</i>
Vestibule is 4 ft plus the width of the door swinging into the space			<i>N/A</i>
Entrance(s) on a level that makes elevators accessible			<i>N/A</i>
Door mats less than 1/2" thick are securely fastened			<i>N/A</i>
Door mats more than 1/2" thick are recessed			<i>N/A</i>
Grates in path of travel have openings of 1/2" maximum			<i>N/A</i>
Signs at non-accessible entrance(s) indicate direction to accessible entrance			<i>NO signs</i>
Emergency egress - alarms with flashing lights and audible signals, sufficiently lighted			<i>N/A</i>

NOTES

LOCATION *Peirce Playground*

STAIRS and DOORS			
Specification	Yes	No	Comments/Transition Notes
<i>Stairs</i>			
No open risers			<i>N/A</i>
Nosings not projecting			
Treads no less than 11" wide			
Handrails on both sides			
Handrails 34"-38" above tread			
Handrail extends a minimum of 1 ft beyond top and bottom riser (if no safety hazard and space permits)			
Handgrip oval or round			
Handgrip has a smooth surface			
Handgrip diameter between 1 1/4" and 1 1/2"			
1 1/2" clearance between wall and handrail			
<i>Doors</i>			
Minimum 32" clear opening			<i>N/A</i>
At least 18" clear floor space on pull side of door			
Closing speed minimum 3 seconds to within 3" of the latch			
Maximum pressure 5 pounds interior doors			
Threshold maximum 1/2" high, beveled on both sides			
Hardware operable with a closed fist (no conventional door knobs or thumb latch devices)			
Hardware minimum 36", maximum 48" above the floor			
Clear, level floor space extends out 5 ft from both sides of the door			
Door adjacent to revolving door is accessible and unlocked			
Doors opening into hazardous area have hardware that is knurled or roughened			

NOTES

LOCATION

Pierce Playground

RESTROOMS – also see Doors and Vestibules			
Specification	Yes	No	Comments/Transition Notes
5 ft turning space measured 12" from the floor			
At least one Sink:			
Clear floor space of 30" by 48" to allow a forward approach			
Mounted without pedestal or legs, height 34" to top of rim			
Extends at least 22" from the wall			
Open knee space a minimum 19" deep, 30" width, and 27" high			
Cover exposed pipes with insulation			
Faucets operable with closed fist (lever or spring activated handle)			
At least one Stall:			
Accessible to person using wheelchair at 60" wide by 72" deep			
Stall door is 36" wide			
Stall door swings out			
Stall door is self closing			
Stall door has a pull latch			
Lock on stall door is operable with a closed fist, and 32" above the floor			
Coat hook is 54" high			
Toilet			
18" from center to nearest side wall			
42" minimum clear space from center to farthest wall or fixture			
Top of seat 17"-19" above the floor			
Grab Bars			
On back and side wall closest to toilet			
1 1/4" diameter			
1 1/2" clearance to wall			
Located 30" above and parallel to the floor			
Acid-etched or roughened surface			
42" long			
Fixtures			
Toilet paper dispenser is 24" above floor			
One mirror set a maximum 38" to bottom (if tilted, 42")			
Dispensers (towel, soap, etc) at least one of each a maximum 42" above the floor			

NOTES

LOCATION: Pence Playground

FLOORS, DRINKING FOUNTAINS, TELEPHONES			
Specification	Yes	No	Comments/Transition Notes
Floors			
N/A			
Non-slip surface			
Carpeting is high-density, low pile, non-absorbent, stretched taut, securely anchored			
Corridor width minimum is 3 ft			
Objects (signs, ceiling lights, fixtures) can only protrude 4" into the path of travel from a height of 27" to 80" above the floor			
Drinking Fountains			
Spouts no higher than 36" from floor to outlet	✓		note: Not accessible from main path
Hand operated push button or level controls	✓		
Spouts located near front with stream of water as parallel to front as possible	✓		
If recessed, recess a minimum 30" width, and no deeper than depth of fountain		✓	
If no clear knee space underneath, clear floor space 30" x 48" to allow parallel approach			clear space
Telephones			
N/A			
Highest operating part a maximum 54" above the floor			
Access within 12" of phone, 30" high by 30" wide			
Adjustable volume control on headset so identified			
SIGNS, SIGNALS, AND SWITCHES			
Specification	Yes	No	Comments/Transition Notes
Switches, Controls and Signs			
N/A			
Switches and controls for light, heat, ventilation, windows, fire alarms, thermostats, etc, must be a minimum of 36" and a maximum of 48" above the floor for a forward reach, a maximum of 54" for a side reach			
Electrical outlets centered no lower than 18" above the floor			
Warning signals must be visual as well as audible			
Signs → none for the disabled			
Mounting height must be 60" to centerline of the sign			
Within 18" of door jamb or recessed			
Letters and numbers at least 1/4" high			
Letters and numbers raised .03"			
Letters and numbers contrast with the background color			

NOTES

Ground not level to be accessible from path to equipment

LOCATION *Pence Playground N/A*

SWIMMING POOLS - accessibility can be via ramp, lifting device, or transfer area			
Specification	Yes	No	Comments/Transition Notes
Ramp at least 34" wide with a non-slip surface extending into the shallow end, slope not exceeding 1:6 with handrails on both sides			
Lifting device			
Transfer area 18" above the path of travel and a minimum of 18" wide			
Unobstructed path of travel not less than 48" wide around pool			
Non-slip surface			

LOCATION *N/A*

SHOWER ROOMS - Showers must accommodate both wheel-in and transfer use			
Specification	Yes	No	Comments/Transition Notes
Stalls 36" by 60" minimum, with a 36" door opening			
Floors are pitched to drain the stall at the corner farthest from entrance			
Floors are non-slip surface			
Controls operate by a single lever with a pressure balance mixing valve			
Controls are located on the center wall adjacent to the hinged seat			
Shower heads attached to a flexible metal hose			
Shower heads attached to wall mounting adjustable from 42" to 72" above the floor			
Seat is hinged and padded and at least 16" deep, folds upward, securely attached to side wall, height is 18" to the top of the seat, and at least 24" long			
Soap trays without handhold features unless they can support 250 pounds			
2 grab bars are provided, one 30" and one 48" long, or one continuous L shaped bar			
Grab bars are placed horizontally at 36" above the floor line			

LOCATION *4 Tables not accessible / no space for a wheel chair*

PICNICKING			
Specification	Yes	No	Comments/Transition Notes
A minimum of 5% of the total tables must be accessible with clear space under the table top not less than 30" wide and 19" deep per seating space and not less than 27" clear from the ground to the underside of the table. An additional 29" clear space (totaling 48") must extend beyond the 19" clear space under the table to provide access		✓	
For tables without toe clearance, the knee space under the table must be at least 28" high, 30" wide and 24" deep.		✓	
Top of table no higher than 32" above ground		✓	
Surface of the clear ground space under and around the table must be stable, firm and slip-resistant, and evenly graded with a maximum slope of 2% in all directions		✓	
Accessible tables, grills and fire rings must have clear ground space of at least 36" around the perimeter			<i>N/A</i>

4 benches - not accessible - off main path

Pierce Playground

Behind Early Childhood

Tennis - 2 entrances
Slope at school too high

Fields - Carolyn said some of best in state

State Park - 13 spaces - no HC space

2 entrances - one OK - one near parking not accessible

Slope to road - ^{Side parking} - to pool - steep.

- No sign about handicap entrance

Signs say Employee parking only, (2) No Parking
This street is tow zone

Weenie roast - no accessibility

Pool House - Gate opening - Bathrooms - were accessible

Pool - not accessible

Softball fields - lower fields not accessible

Field House - offices - meetings

Bathrooms - not accessible - steps

- 2 HC parking spots - too low (need one to say van)
Should be 3rd one

No curb cut off side walk to field house

- no ramp to field house from street

2nd lot - near concession stand

Recommend - stair lift to get to lower field
- or outdoor elevator